



AMP-5700/3BX LINEAR AMPLIFIER 2.5 W FOR 5.8 GHz

This is a high quality professional 2.5 W amplifier module that requires minimum driving input of 80 m W for the maximum of 2.5 W RF power output in 5.8 GHz range. This amplifier is linear and doesn't require any tuning or adjusting. Power supply is 12 V/ 1.6 A. Gain is 28 dB. SMA connectors Input / Output 50 ohms impedance.

Dimensions: 3.25" X 2.5" X 0.8"


FEATURES

- High Output Power: 34.0dBm(typ.)
- High Linear Gain: 28.0dB(typ.)
- Low VSWR
- Broad Band: 5.6 ~ 5.9 GHz
- Impedance Matched 50Ω




Technical Specifications	
BATTERY POWER	12 V-17 V
RF POWER	2.5 W/50 ohms
CURRENT CONSUMPTION	1.5 A
RF IN/OUT	50 ohms
INPUT POWER	10 mW-50 mW
WIDEBAND FREQ. RANGE:	5600 MHz- 5900 MHz
HIGH GAIN	28 dB / 5800 MHz
SIZE:	3.25" X 2.5 " X 0.8"
CLASS	LINEAR AB


OUTPUT POWER vs. FREQUENCY

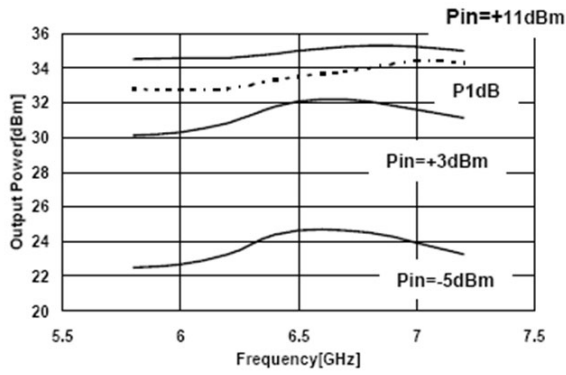

OUTPUT POWER , POWER ADDED EFFICIENCY vs. INPUT POWER

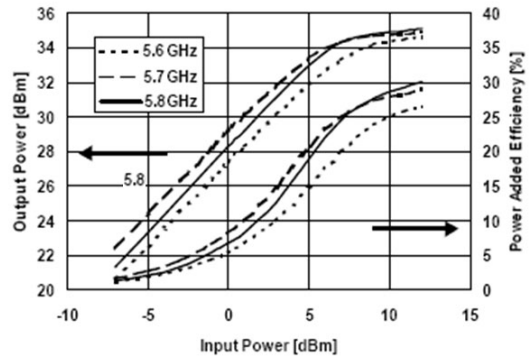

IMD vs OUTPUT POWER(S.C.L.)

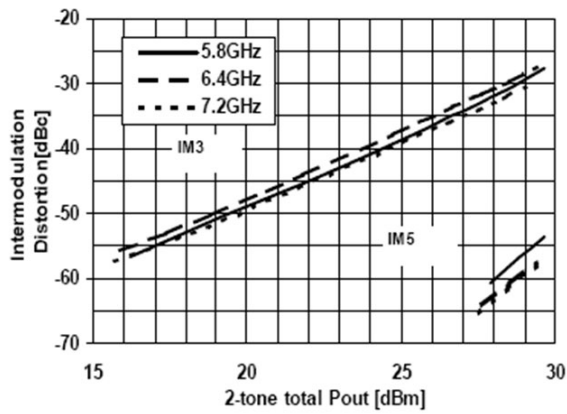

VSWR vs. FREQUENCY

